
17/01/2025

1/7



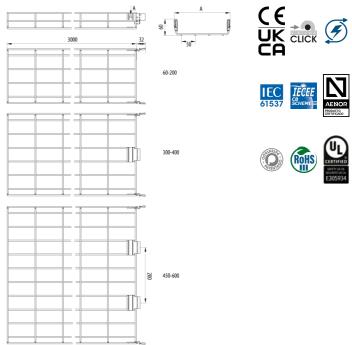

Description

Wire mesh tray made of steel with quick-connect Click system and rounded safety edge for the support and management of cables. Of 60 mm height, Width 200 mm, With EZ protection system. The Rejiband® Rapide Cable Tray is made up of wire mesh rods that provide high strength and elasticity. Easy to assemble, thanks to its flexibility and its quick-connect Click system, it allows the connection between sections of trays without the need for screws, which means savings in material and labour costs. Manufactured according to international standard IEC 61537. It is distributed in different sizes and in several Protection Systems.

Advantages

Flange heights of 60 or 100 mm and widths of 60, 100, 150, 200, 300, 400, 450, 500 and 600 mm with a wide range of accessories.

Rounded safety edge that prevents damage to the cables and harm to the installer.

Electrical continuity guaranteed according to standard IEC61537.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Rapid connection system with pre-fitted couplers reduces installation time by 40%.

Applications

Rapid installation of wire mesh trays for the Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Major Infrastructures, Airports, Underground and Railway, Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food.

Solutions







CENTROS DE DATOS EDIFICACIÓN. TERCIARIO RESISTENCIA AL FUEGO













2/7



Product data

Rejiband. Wire mesh trays 17/01/2025

Rejiband Rapide (Ref: 60512200)

ЕТІМ	EC000853
Protection System	EZ
Finish	EZ3, Electrogalvanised
Resistance Class	Class 3
Flange (mm)	60
Width (mm)	200
Length (m)	3
kg/u	1.120

u	18
Material	Steel with surface coating
Impact Strength (J)	20 J
Section (mm2)	9586
Working temperature range (°C)	-50 / 150 °C
Fire resistance	A1 No combustible

S Protection System

- **CU** Copper electroplated
- **PG** Pregalvanised

- EZ Electrogalvanised
- **BC** Electrogalvanised Bichromate
- BK8 High Resistance Coating
- GC Hot Dip Galvanising
- INOX Stainless Steel
- PT Polyester Paint
- AL Aluminum
- LN Brass or Nickel-plated brass

M Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic














Rejiband Rapide (Ref: 60512200)

17/01/2025


3/7

Load diagrams



EZ B	C BK8	
	40	mm²
	60	2.520
	100	4.420
60	150	6.783
	200	9.333
	300	14.050
	400	19.050
	450	21.500
	500	24.050
	600	29.050

Valores certificados por: Values certified by: Valeurs certifiées par: Valores certificados por:



$ \Leftrightarrow $		mm²
100	100	7.462
	150	11.562
	200	16.290
	300	25.290
	400	34.290
	450	39.396
	500	43.290
	600	52.290

Valores certificados por: Values certified by: Valeurs certifiées par: Valores certificados por:





Product applications










Rejiband. Wire mesh trays 17/01/2025

Rejiband Rapide (Ref: 60512200)



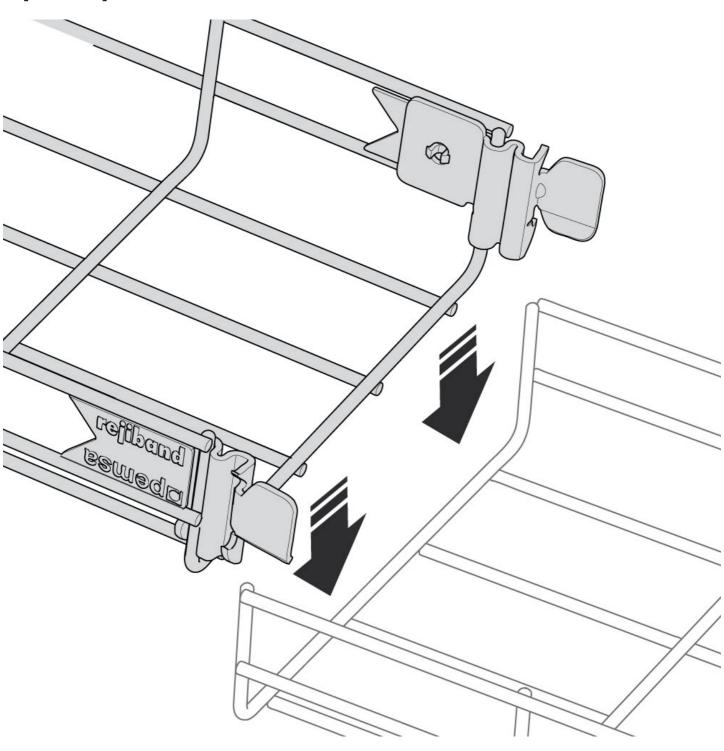










Rejiband Rapide (Ref: 60512200)

17/01/2025

5/7

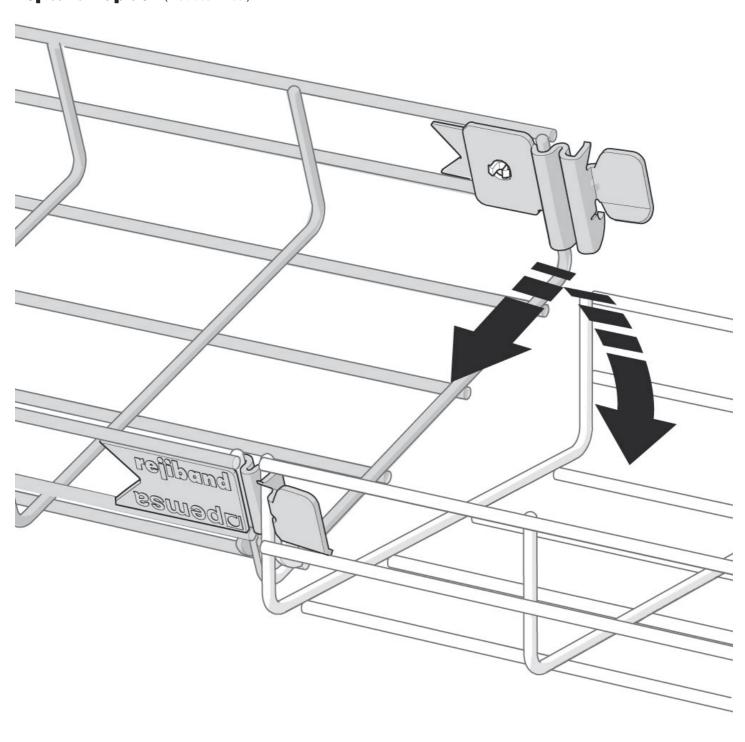












17/01/2025

6/7

Rejiband Rapide (Ref: 60512200)

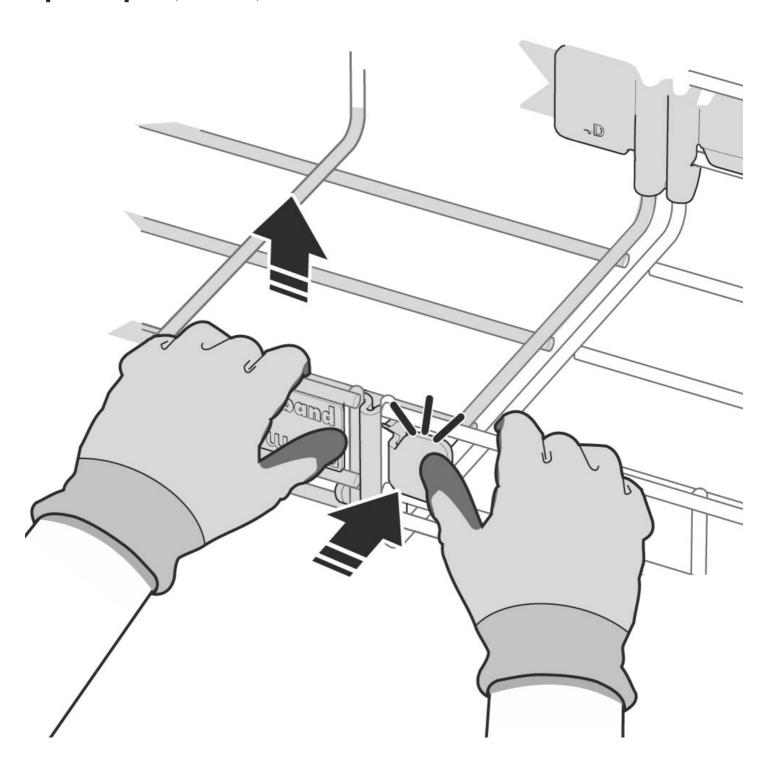









17/01/2025 7/7

Rejiband Rapide (Ref: 60512200)

