

Rejiband. Wire mesh trays Rejiband Rapide (Ref: 60582500) 15/01/2025

1/7

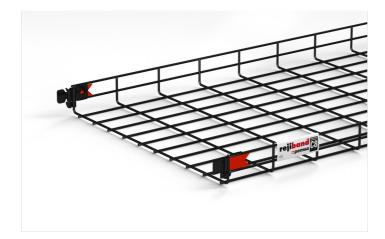

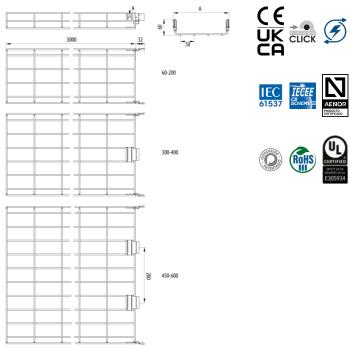

#### Description

Wire mesh tray made of steel with quick-connect Click system and rounded safety edge for the support and management of cables. Of 60 mm height, Width 500 mm, With BK8 protection system. The Rejiband® Rapide Cable Tray is made up of wire mesh rods that provide high strength and elasticity. Easy to assemble, thanks to its flexibility and its quick-connect Click system, it allows the connection between sections of trays without the need for screws, which means savings in material and labour costs. Manufactured according to international standard IEC 61537. It is distributed in different sizes and in several Protection Systems.

### **Advantages**

Flange heights of 60 or 100 mm and widths of 60, 100, 150, 200, 300, 400, 450, 500 and 600 mm with a wide range of accessories.

Rounded safety edge that prevents damage to the cables and harm to the installer.

Electrical continuity guaranteed according to standard IEC61537.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Rapid connection system with pre-fitted couplers reduces installation time by 40%.

## **Applications**

Rapid installation of wire mesh trays for the Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Major Infrastructures, Airports, Underground and Railway, Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food.

#### Solutions













INDUSTRIA QUIMICA FARMACEUTICA

INDUSTRIA PETROQUÍMICA

**ENERGÍA** 

**FOTOVOLTAICA** 

CENTROS DE DATOS

EDIFICACIÓN, TERCIARIO



TUNELES. INFRAESTRUCTURAS RESISTENCIA AL FUEGO















15/01/2025

2/7

# Rejiband Rapide (Ref: 60582500)

Product data			
ETIM	EC000853	u	6
Protection System	BK8	Material	Steel with surface coating
Finish	BLACK C8	Impact Strength (J)	20 J
Resistance Class	Class 8	Section (mm2)	24660
Flange (mm)	60	Working temperature range (°C)	-50 / 150 °C
Width (mm)	500	Fire resistance	A1 No combustible
Length (m)	3		
kg/u	2.489		

## **S** Protection System

- **CU** Copper electroplated
- **PG** Pregalvanised
- EZ Electrogalvanised
- **BC** Electrogalvanised Bichromate
- BK8 High Resistance Coating
- GC Hot Dip Galvanising
- INOX Stainless Steel
- PT Polyester Paint
- AL Aluminum
- LN Brass or Nickel-plated brass

## **M** Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

- PVC Polyvinyl Chloride
- PP Halogen Free Polypropylene
- PA6 Halogen Free Polyamide 6
- PA12 Halogen Free Polyamide 12
- PU Polyurethane
- PE Polyethylene
- NBR NBR rubber
- PET Thermoplastic Polyester
- TPV Thermoplastic














# Rejiband Rapide (Ref: 60582500)

15/01/2025


#### 3/7

## **Load diagrams**



EZ B	C BK8		
		mm²	
	60	2.520	
	100	4.420	
60	150	6.783	
	200	9.333	
	300	14.050	
	400	19.050	
	450	21.500	
	500	24.050	
	600	29.050	

Valores certificados por: Values certified by: Valeurs certifiées par: Valores certificados por:



EZ	BC BK8				⊜ 100
	100/200	150	300/400	450	500/600
	140				
1	100		ionanananananananananananananananananana		
Kg/m	80				ananananananananananananananananananan
	40	\			
	20				
L(m)	1,0		1,5		2,0

EZ B	C BK8		
		mm²	
100	100	7.462	
	150	11.562	
	200	16.290	
	300	25.290	
	400	34.290	
	450	39.396	
	500	43.290	
	600	52.290	

Valores certificados por: Values certified by: Valeurs certifiées par: Valores certificados por:





## **Product applications**










Rejiband Rapide (Ref: 60582500)

15/01/2025



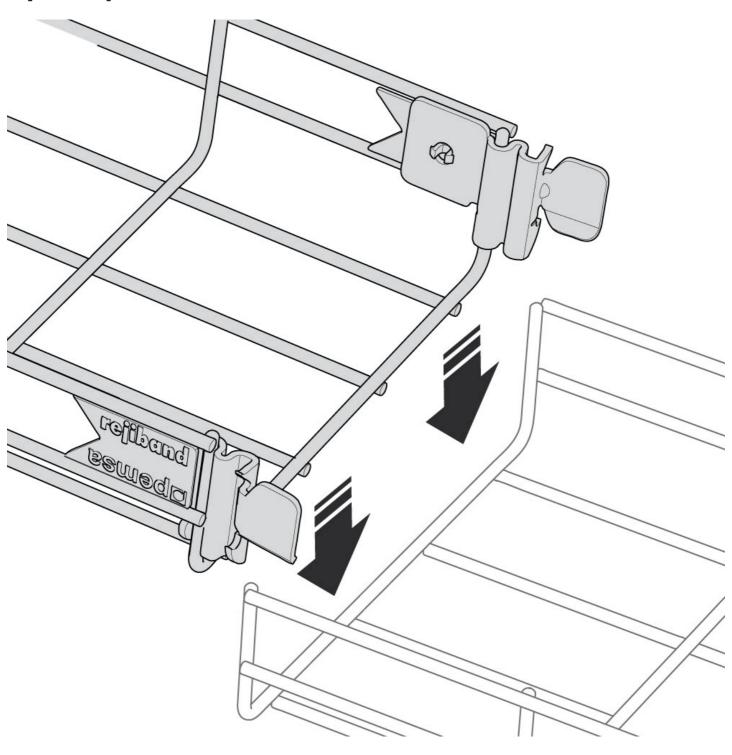












Rejiband. Wire mesh trays 15/01/2025

Rejiband Rapide (Ref: 60582500)

5/7

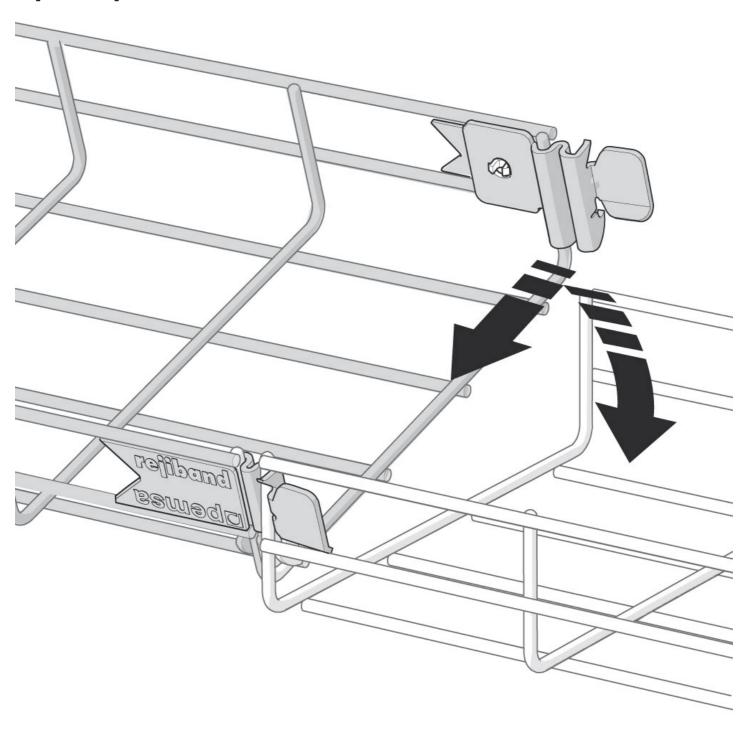












15/01/2025

6/7

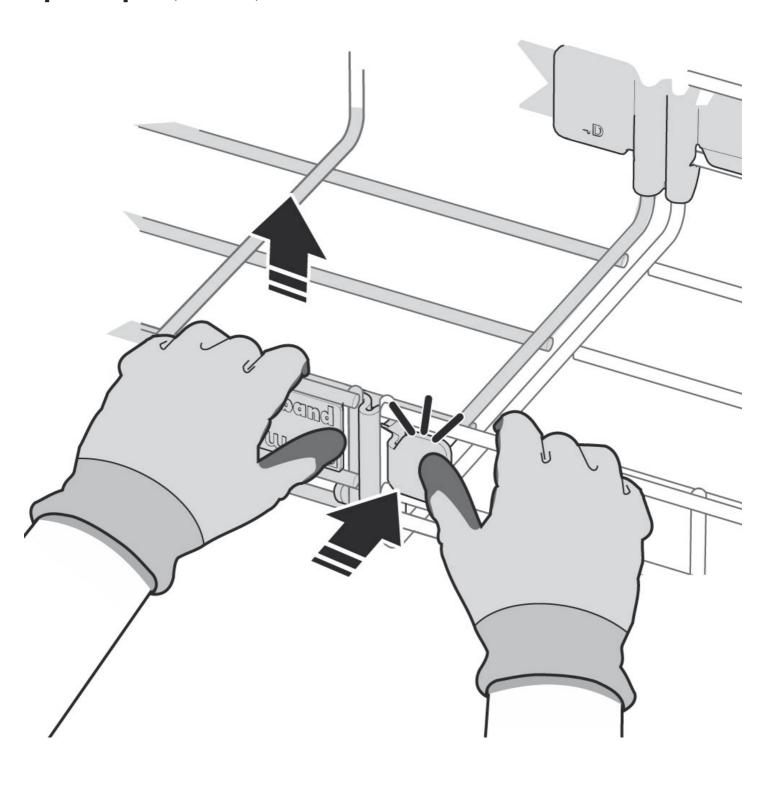









15/01/2025

7/7

Rejiband Rapide (Ref: 60582500)

