

15/01/2025

1/7

Rejiband Rapide (Ref: 60582600)



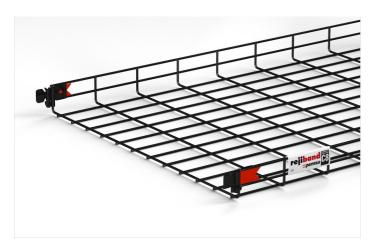

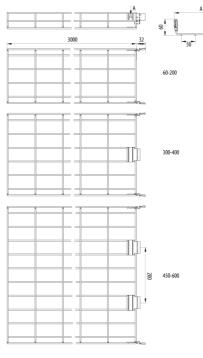













Description

Wire mesh tray made of steel with quick-connect Click system and rounded safety edge for the support and management of cables. Of 60 mm height, Width 600 mm, With BK8 protection system. The Rejiband® Rapide Cable Tray is made up of wire mesh rods that provide high strength and elasticity. Easy to assemble, thanks to its flexibility and its quick-connect Click system, it allows the connection between sections of trays without the need for screws, which means savings in material and labour costs. Manufactured according to international standard IEC 61537. It is distributed in different sizes and in several Protection Systems.

Advantages

Flange heights of 60 or 100 mm and widths of 60, 100, 150, 200, 300, 400, 450, 500 and 600 mm with a wide range of accessories.

Rounded safety edge that prevents damage to the cables and harm to the installer.

Electrical continuity guaranteed according to standard IEC61537.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Rapid connection system with pre-fitted couplers reduces installation time by 40%.

Applications

Rapid installation of wire mesh trays for the Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Major Infrastructures, Airports, Underground and Railway, Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food.

Solutions













INDUSTRIA QUIMICA FARMACEUTICA

INDUSTRIA PETROQUÍMICA

ENERGÍA

FOTOVOLTAICA

CENTROS DE DATOS

EDIFICACIÓN, TERCIARIO





TUNELES. INFRAESTRUCTURAS RESISTENCIA AL FUEGO

















Product data

Rejiband. Wire mesh trays

Rejiband Rapide (Ref: 60582600)

15/01/2025 2/7

ETIM	EC000853	u
Protection System	BK8	Materia
Finish	BLACK C8	Impact
Resistance Class	Class 8	Section
Flange (mm)	60	Workin
Width (mm)	600	Fire res
Length (m)	3	

2.856

u	6
Material	Steel with surface coating
Impact Strength (J)	20 J
Section (mm2)	29780
Working temperature range (°C)	-50 / 150 °C
Fire resistance	A1 No combustible

S Protection System

- **cu** Copper electroplated
- **PG** Pregalvanised

kg/u

- EZ Electrogalvanised
- **BC** Electrogalvanised Bichromate
- BK8 High Resistance Coating
- GC Hot Dip Galvanising
- INOX Stainless Steel
- PT Polyester Paint
- AL Aluminum
- LN Brass or Nickel-plated brass

M Insulating materials

- **PC+ABS** Halogen Free Polycarbonate + ABS
- PVC Polyvinyl Chloride
- **PP** Halogen Free Polypropylene
- PA6 Halogen Free Polyamide 6
- PA12 Halogen Free Polyamide 12
- PU Polyurethane
- PE Polyethylene
- NBR NBR rubber
- PET Thermoplastic Polyester
- TPV Thermoplastic












Rejiband Rapide (Ref: 60582600)

15/01/2025


3/7

Load diagrams



EZ B	C BK8	
	40	mm²
	60	2.520
	100	4.420
60	150	6.783
	200	9.333
	300	14.050
	400	19.050
	450	21.500
	500	24.050
	600	29.050

Valores certificados por: Values certified by: Valeurs certifiées par: Valores certificados por:



EZ BC BK8		
		mm²
100	100	7.462
	150	11.562
	200	16.290
	300	25.290
	400	34.290
	450	39.396
	500	43.290
	600	52.290

Valores certificados por: Values certified by: Valeurs certifiées par: Valores certificados por:





Product applications














Rejiband. Wire mesh trays 15/01/2025

Rejiband Rapide (Ref: 60582600)



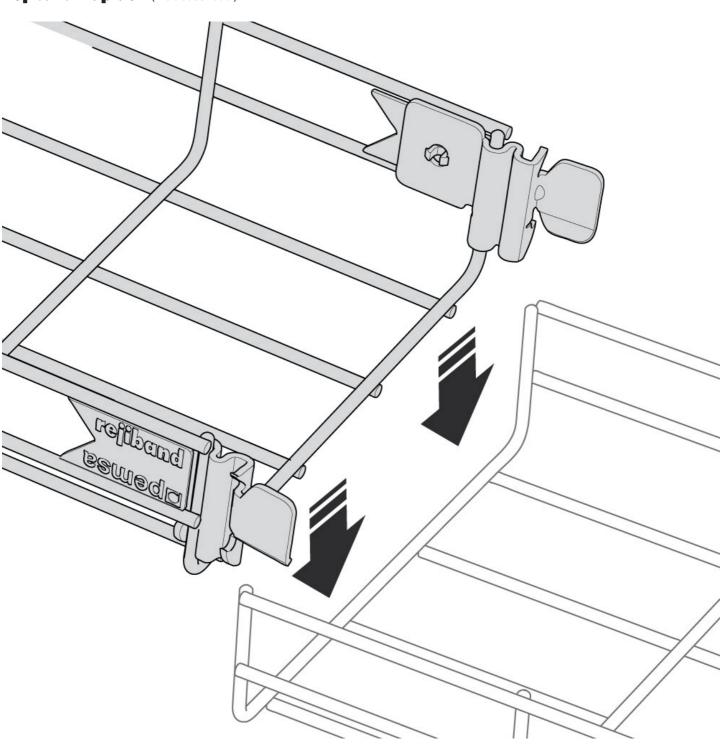










Rejiband Rapide (Ref: 60582600)

15/01/2025

5/7

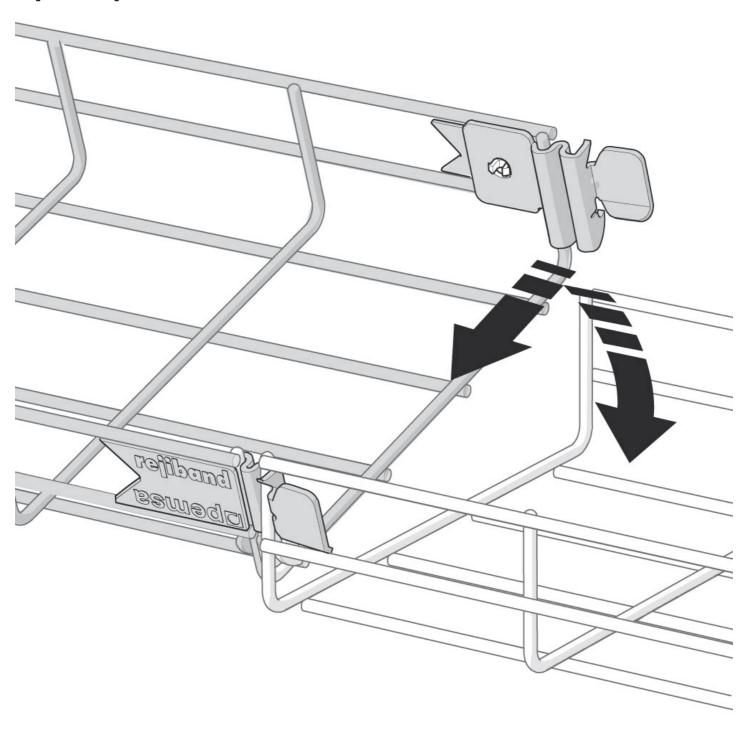







15/01/2025

6/7













15/01/2025

7/7

